

Operating System

Kernel and the boot process

Nick Urbanik <`nicku(at)nicku.org`>

Copyright Conditions: GNU FDL (see <http://www.gnu.org/licenses/fdl.html>)

A computing department

Operating System: Kernel and boot process

What is it?

What does it do?

How does it start up?

Operating System: Kernel and boot process

[Role of OS](#)

[System Calls](#)

[Types of OS](#)

[Monolithic Kernel](#)

[Layered Kernel](#)

[Microkernel](#)

[Virtual machine](#)

[Boot Process](#)

[Runlevels](#)

[References](#)

What is an operating system?

- Is it what you get when you install Linux, Windows XP or Windows 2000?
- Does it include such things as (g)notepad, g++ or Visual C++?
- How about `bash`, `cmd.exe` or `command.com`?

Operating System: Kernel and boot process

Role of OS

What is an operating system?

The OS is the kernel

Kernel in Linux

Kernel in Windows XP, 2000,

Win NT

What does an OS do?

Is there a User Friendly OS?

Example: MAC OS X

IE part of Windows?

What resources?

... Allocated to who/what?

Kernel mode and user mode

Access Hardware?

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

References

The OS is the kernel

- The **operating system is the kernel**
- When the computer boots the operating system, it loads the kernel into memory.

Operating System: Kernel and boot process

Role of OS

What is an operating system?

The OS is the kernel

Kernel in Linux

Kernel in Windows XP, 2000,

Win NT

What does an OS do?

Is there a User Friendly OS?

Example: MAC OS X

IE part of Windows?

What resources?

... Allocated to who/what?

Kernel mode and user mode

Access Hardware?

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

References

Kernel in Linux

- In Linux, kernel can be loaded by LILO or grub
- Kernel is in `/boot`
- In RH 9, it is
 - ◆ `/boot/vmlinuz-2.4.20-20.9`,
 - ◆ or if you build your own, something like `/boot/vmlinuz-2.4.22-ac6`
- It is a *monolithic kernel*

Operating System: Kernel and boot process

Role of OS

What is an operating system?

The OS is the kernel

Kernel in Linux

Kernel in Windows XP, 2000, Win NT

What does an OS do?

Is there a User Friendly OS?

Example: MAC OS X

IE part of Windows?

What resources?

... Allocated to who/what?

Kernel mode and user mode

Access Hardware?

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

References

Kernel in Windows XP, 2000, Win NT

- In `%SystemRoot%\System32`
 - ◆ `%SystemRoot%` = `C:\winnt`, or `D:\winnt`,...
- Called `ntoskrnl.exe`
- Microsoft call it a *layered kernel* or *microkernel*.
- sometimes called the “Executive services” and the “NT executive”
- Bottom layer is the *hardware abstraction layer*

Operating System: Kernel and boot process

Role of OS

What is an operating system?

The OS is the kernel

Kernel in Linux

Kernel in Windows XP, 2000, Win NT

What does an OS do?

Is there a User Friendly OS?

Example: MAC OS X

IE part of Windows?

What resources?

... Allocated to who/what?

Kernel mode and user mode

Access Hardware?

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

References

What does an OS do?

- Provides a “government” to share out the *hardware resources* fairly
- Provides a way for the programmer to easily work with the hardware and software through a set of *system calls* — see slides §15–§18.
 - ◆ Sometimes also called *supervisor calls*

Operating System: Kernel and boot process

Role of OS

What is an operating system?

The OS is the kernel

Kernel in Linux

Kernel in Windows XP, 2000,

Win NT

What does an OS do?

Is there a User Friendly OS?

Example: MAC OS X

IE part of Windows?

What resources?

... Allocated to who/what?

Kernel mode and user mode

Access Hardware?

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

References

Is there a User Friendly os?

- Some people have said that the Windows OSs are more user friendly than Linux
- Can this be the case?
 - ◆ Are the *system calls* more user friendly?
 - (see slides §15–§18 for more about system calls)
 - ◆ Does Windows *manage the hardware* in a more user friendly way?
- No!
- The user interface is not an operating system issue. See your subject Human Computer Interfaces (HCI)
- Do you want a more user friendly interface for Linux?
 - ◆ Then write one! Contribute to the Gnome or KDE projects.

Operating System: Kernel and boot process

Role of OS

What is an operating system?

The OS is the kernel

Kernel in Linux

Kernel in Windows XP, 2000,

Win NT

What does an OS do?

Is there a User Friendly os?

Example: MAC OS X

IE part of Windows?

What resources?

... Allocated to who/what?

Kernel mode and user mode

Access Hardware?

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

References

Example: MAC OS X

- The Mac has a deserved reputation for a great user interface
- OS X is the latest OS from Apple
- Very beautiful, easy to use
- But it is Unix, built on FreeBSD!
 - ◆ The Unix that till now has mostly been used on servers;
 - ◆ considered by some to be less user friendly than Linux
- The User Interface is not part of the OS

Operating System: Kernel and boot process

Role of OS

What is an operating system?

The OS is the kernel

Kernel in Linux

Kernel in Windows XP, 2000,

Win NT

What does an OS do?

Is there a User Friendly OS?

Example: MAC OS X

IE part of Windows?

What resources?

... Allocated to who/what?

Kernel mode and user mode

Access Hardware?

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

References

Is IE part of Windows oss?

- Is Internet Explorer part of the Windows operating systems?
- Please discuss this question with your neighbour.
- See

<http://news.com.com/2100-1001-219029.html?legacy=cnet>

Operating System: Kernel and boot process

Role of OS

What is an operating system?

The OS is the kernel

Kernel in Linux

Kernel in Windows XP, 2000,

Win NT

What does an OS do?

Is there a User Friendly OS?

Example: MAC OS X

IE part of Windows?

What resources?

... Allocated to who/what?

Kernel mode and user mode

Access Hardware?

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

References

What resources does OS manage?

- The OS manages resources such as:
 - ◆ Use of CPU
 - ◆ Memory
 - ◆ Files and disk access
 - ◆ Printing
 - ◆ Network access
 - ◆ I/O devices such as keyboard, mouse, display, USB devices, . . .

Operating System: Kernel and boot process

Role of OS

What is an operating system?

The OS is the kernel

Kernel in Linux

Kernel in Windows XP, 2000,

Win NT

What does an OS do?

Is there a User Friendly OS?

Example: MAC OS X

IE part of Windows?

What resources?

. . . Allocated to who/what?

Kernel mode and user mode

Access Hardware?

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

References

... Allocated to who/what?

- An operating system can be *multiuser*
 - ◆ In this case, resources must be allocated to the users fairly
- “Proper” operating systems are *multitasking*
 - ◆ Resources must be allocated fairly to the processes
- Users, processes must be protected from each other.

Operating System: Kernel and boot process

Role of OS

What is an operating system?

The OS is the kernel

Kernel in Linux

Kernel in Windows XP, 2000,

Win NT

What does an OS do?

Is there a User Friendly OS?

Example: MAC OS X

IE part of Windows?

What resources?

... Allocated to who/what?

Kernel mode and user mode

Access Hardware?

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

References

Kernel mode and user mode

- *Kernel* means “central part”
- The kernel is the central part of OS
- It is a program running at all times
- Application programs run in “*user mode*”
 - ◆ Cannot access hardware directly
- Kernel runs in “*kernel mode*” (or “*supervisor mode*”)
 - ◆ *Can access hardware, special CPU registers*

Operating System: Kernel and boot process

Role of OS

What is an operating system?

The OS is the kernel

Kernel in Linux

Kernel in Windows XP, 2000,

Win NT

What does an OS do?

Is there a User Friendly OS?

Example: MAC OS X

IE part of Windows?

What resources?

... Allocated to who/what?

Kernel mode and user mode

Access Hardware?

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

References

How does user program access hardware?

- A program that writes to the disk accesses hardware
- How?
- Standard library call, e.g., `fprintf()`
- Library contains ***system calls***
 - ◆ see slides §15–§18
- A system call passes the request to the kernel
- The kernel, (executing in kernel mode always) writes to the disk
- Returns telling user program that it was successful or not

Operating System: Kernel and boot process

Role of OS

What is an operating system?

The OS is the kernel

Kernel in Linux

Kernel in Windows XP, 2000,

Win NT

What does an OS do?

Is there a User Friendly OS?

Example: MAC OS X

IE part of Windows?

What resources?

... Allocated to who/what?

Kernel mode and user mode

Access Hardware?

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

References

Kernel: programmers' standard interface

- This is the *second important function* of the operating system
- Provides a standard set of *system calls*, used by the libraries
- User programs usually use the system calls indirectly
 - ◆ since libraries give higher level interface

Operating System: Kernel and boot process

Role of OS

System Calls

System calls

System Call

System Calls — Linux

Windows System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

References

System Call

- Low level details:
 - ◆ CPU provides a *trap* instruction which puts the CPU into a privileged mode, i.e., kernel mode
 - On Intel ix86 architecture, the trap instruction is the `int 0x80` instruction
 - See `include/asm-i386/unistd.h` and `arch/i386/kernel/entry.S` in Linux source code. See also <http://en.tldp.org/LDP/khg/HyperNews/get/syscall/syscall186.html>
 - ◆ Sometimes called a *software interrupt*
 - ◆ put parameters into CPU registers before the call
 - ◆ save values of many registers on a stack
- High level: all this buried in external library interface

Operating System: Kernel and boot process

Role of OS

System Calls

System calls

System Call

System Calls — Linux

Windows System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

References

System Calls — Linux

- POSIX specifies particular function calls that usually map directly to system calls — see `man` section 2
- Provide a higher level interface to system calls
- Less than 300 of them. Examples:

| Call | Description |
|--|--|
| <code>pid = fork()</code> | Create a child process identical to parent process |
| <code>exit(status)</code> | Terminate process and return status |
| <code>fd = open(file, O_RDONLY)</code> | Open a file for reading, writing or both |
| <code>status = close(fd)</code> | Close an open file |
| <code>n = read(fd, buffer, nbytes)</code> | Read data from file into a buffer |
| <code>n = write(fd, buffer, nbytes)</code> | Write data from buffer into a file |
| <code>status = chdir(dirname)</code> | Change working directory of process |

Operating System: Kernel and boot process

Role of OS

System Calls

System calls

System Call

System Calls — Linux

Windows System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

References

System Calls — Windows and Win32 API

- Win32 API provides many thousands of calls
- No one-one mapping to system calls
- Not all make a system call
- On some versions of Windows OSS, graphics calls are system calls, on others they are not
- Win32 API documented on MSDN. Examples:

| POSIX | Win32 | Description |
|-------|---------------|-------------------------------------|
| fork | CreateProcess | create a new process |
| exit | ExitProcess | Terminate execution |
| open | CreateFile | Create a file or open existing file |
| close | CloseHandle | Close a file |
| read | ReadFile | Read data from a file |
| write | WriteFile | Write data to a file |

Operating System: Kernel and boot process

Role of OS

System Calls

System calls

System Call

System Calls — Linux

Windows System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

References

Types of Operating System

A rough breakdown of the types of OS

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Types of Operating System

Types of OS?

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

References

What types of operating systems are there?

- There are **four main categories**; depends on *organisation* of the *kernel*
- **Monolithic** operating systems
 - ◆ **Linux** is a monolithic OS
- **Layered** operating systems
 - ◆ **Windows NT/2000/XP/2003** is described as a layered architecture
- **Microkernel with client server architecture**
 - ◆ The **QNX** real-time OS is truly a microkernel; the kernel is said to be only eight kilobytes in size!
 - ◆ Andrew Tanenbaum wrote the **MINIX** operating system as an example microkernel OS for students to study
 - ◆ The **GNU Hurd** OS has a microkernel architecture
 - ◆ **Windows 2000** is described as having a hybrid layered-microkernel architecture, although Andrew **Tanenbaum disagrees**:
<http://www.cs.vu.nl/~ast/brown/>
- **Virtual machine** architecture

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Types of Operating System

Types of OS?

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

References

Monolithic Kernel

- A monolithic kernel has all *procedures* in the same *address space*.
 - ◆ This means that all the code can see the same global variables, same functions calls, and
 - ◆ there is only one set of addresses for all the kernel
- Purpose is *speed*:
 - ◆ to reduce overhead of communication between layers

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Monolithic Kernel

Monolithic kernel — 2

Structure in a Monolithic Kernel

Monolithic kernel: loadable

modules

Monolithic kernel: Loadable

Modules

Layered Kernel

Microkernel


Virtual machine

Boot Process

Runlevels

References

Monolithic kernel — 2

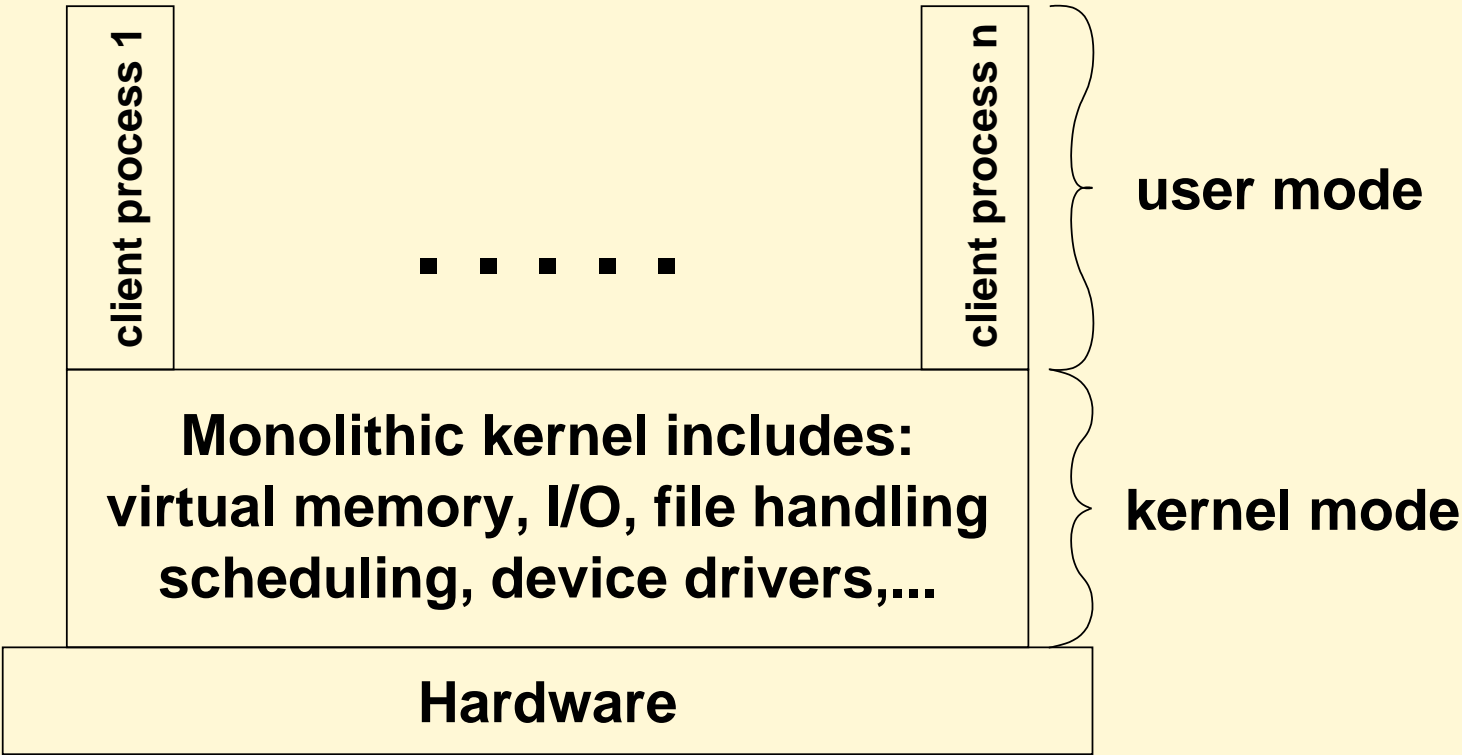

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Monolithic Kernel

Monolithic kernel — 2

Structure in a Monolithic Kernel
Monolithic kernel: loadable modules
Monolithic kernel: Loadable Modules

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

References

Structure in a Monolithic Kernel

- To avoid chaos, a monolithic kernel must be well structured
- Linux kernel uses *loadable modules*, which support hardware and various software features
- Such as RAID, Logical Volume Managers, various file systems, support for various networking protocols, firewalling and packet filtering, . . .

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Monolithic Kernel

Monolithic kernel — 2

Structure in a Monolithic Kernel

Monolithic kernel: loadable modules

Monolithic kernel: Loadable

Modules

Layered Kernel

Microkernel


Virtual machine

Boot Process

Runlevels

References

Monolithic kernel: loadable modules

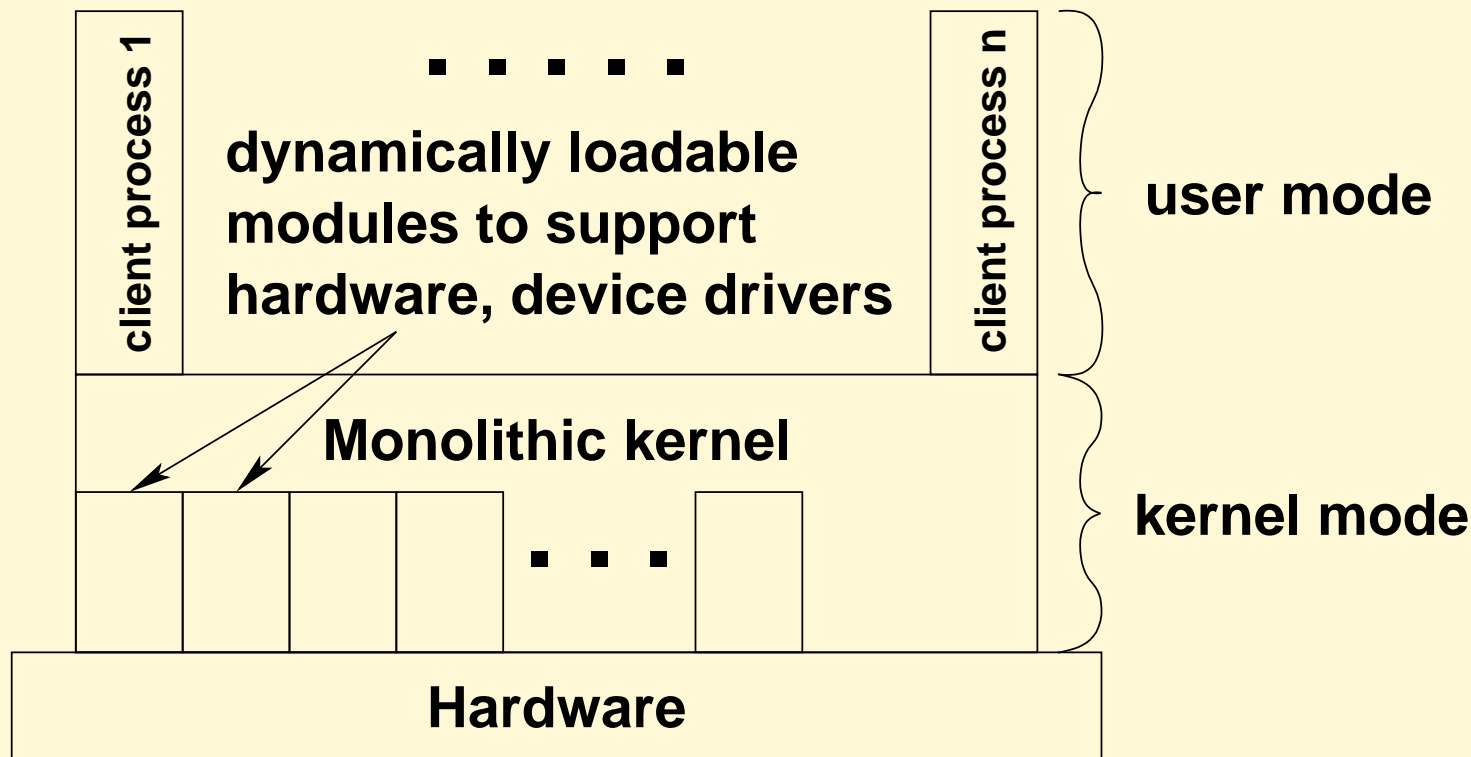

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Monolithic Kernel

Monolithic kernel — 2

Structure in a Monolithic Kernel

Monolithic kernel: loadable modules

Monolithic kernel: Loadable Modules

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

References

Monolithic kernel: Loadable Modules

- Loadable modules in Linux kernel support:
- *Dynamic Linking*: modules can be loaded and linked with the kernel, or unloaded, while kernel is executing
- *Stackable Modules*: Modules can provide support for each other, so many modules can be stacked on a lower level module.
- Reduces replication of code
- Hierarchical structure ensures that modules will remain loaded while required
- View loaded modules by typing `lsmod`

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Monolithic Kernel

Monolithic kernel — 2

Structure in a Monolithic Kernel

Monolithic kernel: loadable

modules

Monolithic kernel: Loadable

Modules

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

References

Layered kernel

- Has different levels; example:
- Lowest level manages hardware
- Next level up manages, e.g., memory and disks
- Next level up manages I/O,
- Each layer may have its own address space
- Communication between layers requires overhead
- Advantage is different layers cannot interfere with each other.

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Layered kernel

Layered Kernel — 2

Microkernel

Virtual machine

Boot Process

Runlevels

References

Layered Kernel — 2

| | |
|-----------------|-------------------------------------|
| 5 | User Programs |
| 4 | File Systems |
| 3 | Interprocess Communication |
| 2 | I/O and device management |
| 1 | Virtual memory |
| 0 | Primitive process management |
| Hardware | |

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Layered kernel

Layered Kernel — 2

Microkernel

Virtual machine

Boot Process

Runlevels

References

Microkernel with Client-Server Arch.

- *Microkernel* architecture keeps the kernel *as small as possible*, for the sake of reliability and security
- As much is done in the user space as possible
- User space provides servers, such as memory server, file server, terminal server, process server
- Kernel directs requests from user programs to user servers

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Microkernel with Client-Server Arch.

Microkernel Architecture — 2

Microkernel Architecture — 3

Microkernel Architecture —

Examples

Windows 2000 Architecture

Windows 2000 Architecture — 2


Virtual machine

Boot Process

Runlevels

References

Microkernel Architecture — 2

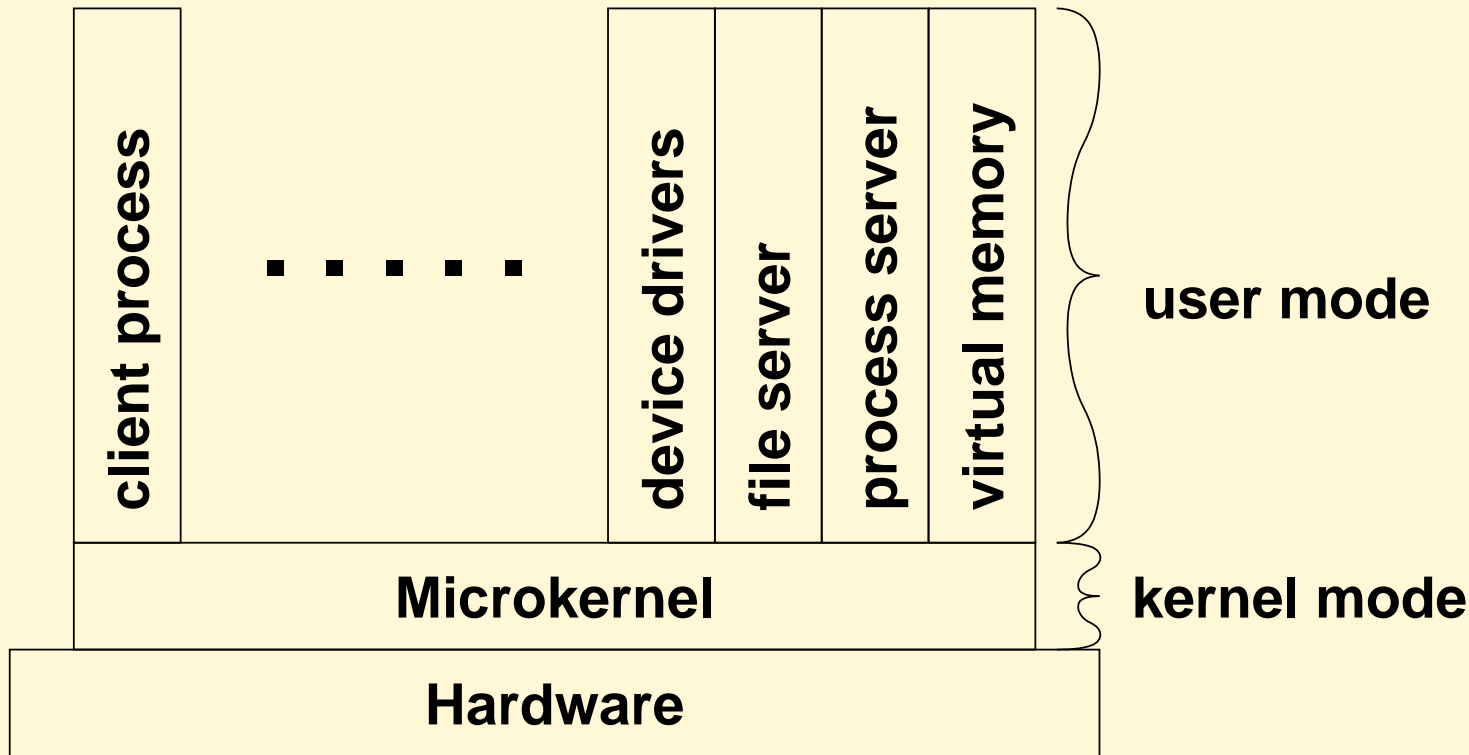

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Microkernel with Client-Server Arch.

Microkernel Architecture — 2

Microkernel Architecture — 3

Microkernel Architecture —

Examples

Windows 2000 Architecture

Windows 2000 Architecture — 2

Virtual machine


Boot Process

Runlevels

References

Microkernel Architecture — 3

- Most of operating system is a set of user processes
- the server processes do most of the work
- The microkernel mostly just passes requests from client processes to server processes

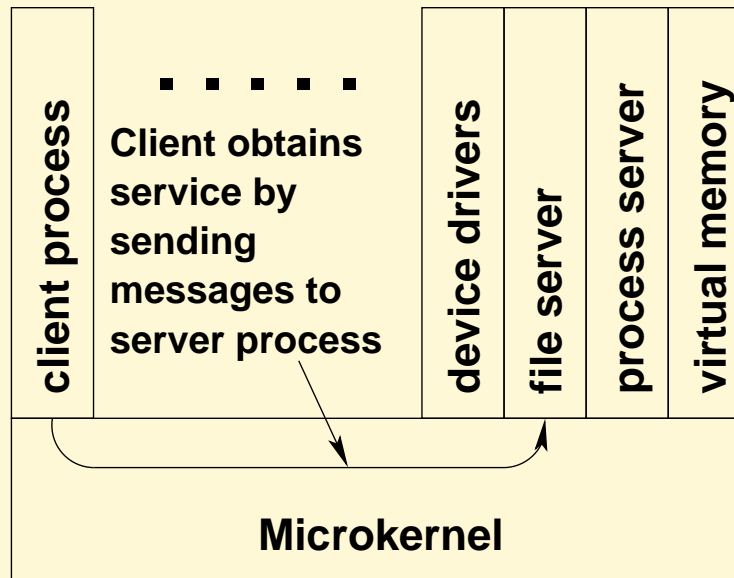

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Microkernel with Client-Server Arch.

Microkernel Architecture — 2

Microkernel Architecture — 3

Microkernel Architecture —

Examples

Windows 2000 Architecture

Windows 2000 Architecture — 2

Virtual machine

Boot Process

Runlevels

References

Microkernel Architecture — Examples

- Mach kernel used as core for many Unix OS
 - ◆ including the MAC OS X
- GNU Hurd OS, initiated by Richard Stallman for the GNU project
- The QNX distributed real-time Unix-like OS
 - ◆ kernel only 8 KB in size!
- It can be *debated* whether Windows NT/2000/XP/2003 operating systems are microkernels:

“With all the security problems Windows has now, it is increasingly obvious to everyone that tiny microkernels, like that of MINIX, are a better base for operating systems than huge monolithic systems.”

— Prof. Andrew Tanenbaum,
<http://www.cs.vu.nl/~ast/brown/>

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Microkernel with Client-Server Arch.

Microkernel Architecture — 2

Microkernel Architecture — 3

Microkernel Architecture —

Examples

Windows 2000 Architecture

Windows 2000 Architecture — 2

Virtual machine


Boot Process

Runlevels

References

Windows 2000 Architecture

- Windows 2000 is described as a hybrid between a layered architecture and microkernel architecture.
- HAL provides an abstract machine—aim to make porting to other hardware architectures easier
- HAL + Microkernel \approx normal microkernel

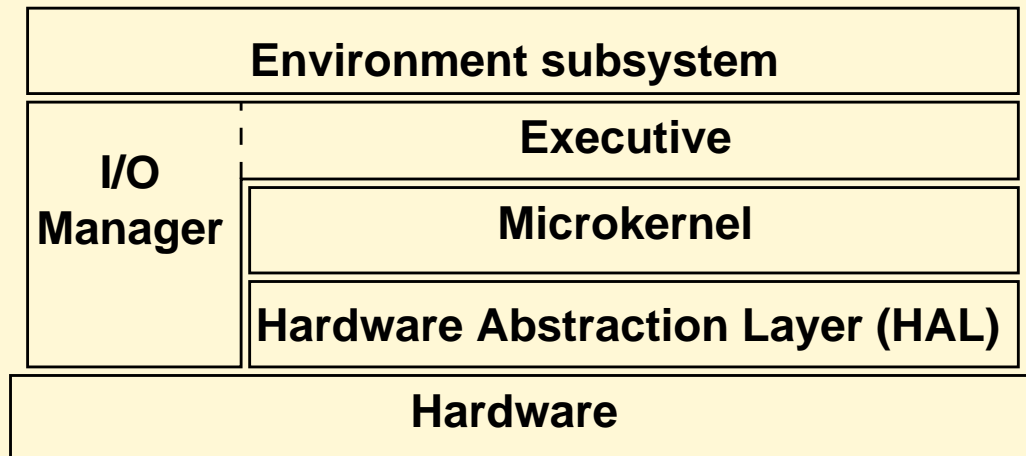

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Microkernel with Client-Server Arch.

Microkernel Architecture — 2

Microkernel Architecture — 3

Microkernel Architecture —

Examples

Windows 2000 Architecture

Windows 2000 Architecture — 2

Virtual machine

Boot Process

Runlevels

References

Windows 2000 Architecture — 2

- Environment subsystem aims to support DOS, Win32, OS/2 applications
 - ◆ each environment subsystem uses a DLL (dynamic link library) to convert system calls to Windows 2000 calls
- The I/O manager contains file system and device drivers
- Microkernel, HAL and “many functions of the executive” execute in kernel mode.
 - ◆ **Sacrifice advantage of microkernel** of reduced code executing in kernel mode
 - ◆ **to reduce communication overhead**

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Microkernel with Client-Server Arch.

Microkernel Architecture — 2

Microkernel Architecture — 3

Microkernel Architecture —

Examples

Windows 2000 Architecture

Windows 2000 Architecture — 2

Virtual machine

Boot Process

Runlevels

References

Virtual machine

- Virtual hardware
- Many operating systems run independently on same computer
- IBM now selling *mainframes* running many instances of Linux to Telecom companies — see next slides
- *VMWare* allows something similar on PC:
<http://www.VMWare.com>
- <http://www.connectix.com/> used to sell *Virtual PC* and *Virtual Server*, but they have been bought out by Microsoft, who of course, have dropped Linux support:
<http://www.msfn.org/comments.php?id=5516&catid=1>
- *Java Virtual machine* also provides virtual hardware that all programs can execute on.

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Virtual machine

Virtual Machine OS Examples

Linux on zVM on ZSeries

Mainframe

Many Individual Machines

Many Virtual Machines, one

Mainframe

With Kernels, "small is beautiful"

Boot Process

Runlevels

References

Virtual Machine OS Examples

- IBM designed the CP/CMS virtual OS for their S/360 mainframe.
- Later called VM/370 to run on their S/370 mainframes
- Later called VM/ESA on the S/390 hardware
- Now sold as zVM[®] running on zSeries mainframes
 - ◆ Supports running many different OS, particularly Linux
 - ◆ See <http://www.vm.ibm.com/>
- See how MIT run Linux on VM/ESA on their S/390 mainframe:
<http://mitvma.mit.edu/system/vm.html>
- Search the web for articles on Linux running on mainframes.

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Virtual machine

Virtual Machine OS Examples

Linux on zVM on ZSeries

Mainframe

Many Individual Machines

Many Virtual Machines, one

Mainframe


With Kernels, "small is beautiful"

Boot Process

Runlevels

References

Linux on zVM on ZSeries Mainframe

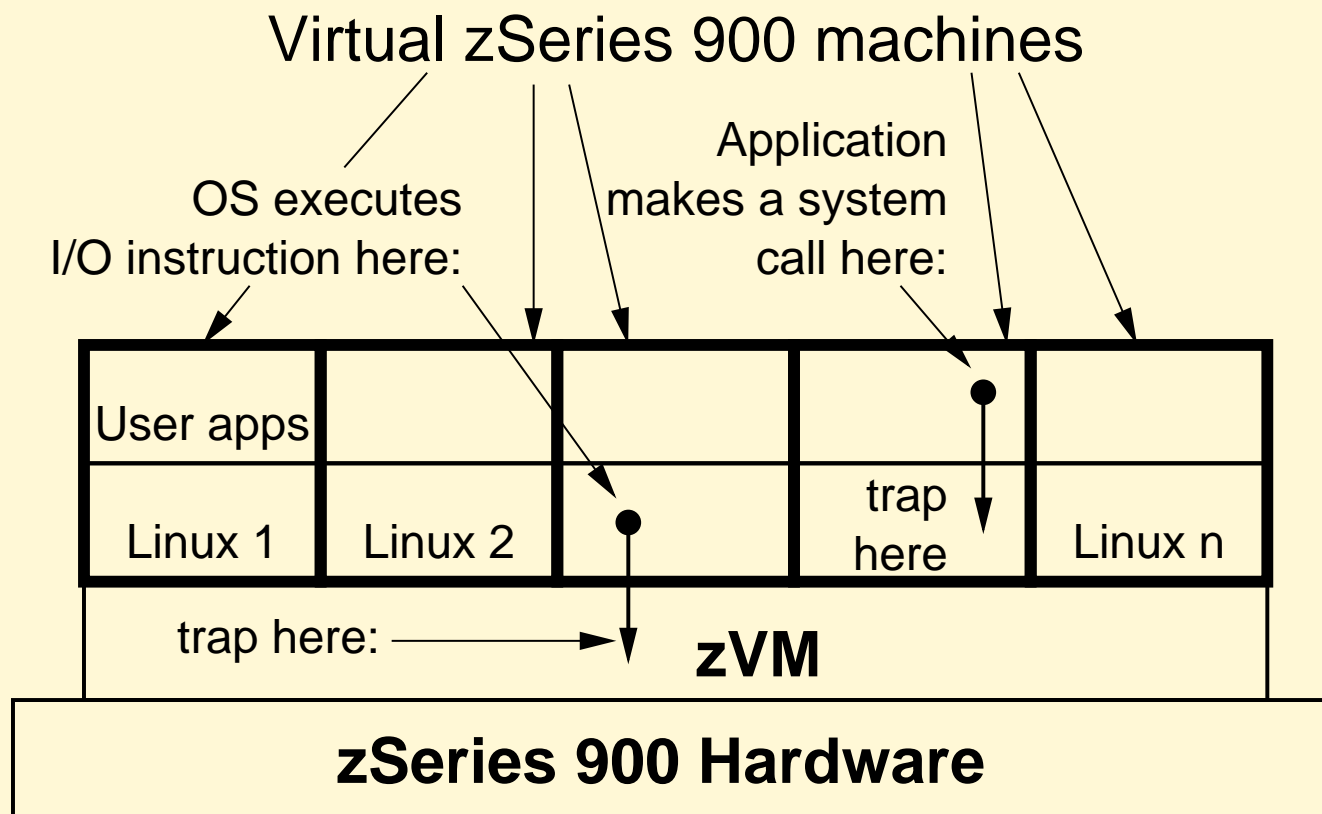

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Virtual machine

Virtual Machine OS Examples

Linux on zVM on ZSeries Mainframe

Many Individual Machines

Many Virtual Machines, one Mainframe

With Kernels, "small is beautiful"

Boot Process

Runlevels

References

Many Individual Machines

- A data centre may have many servers
 - ◆ Each must be powerful enough to meet *peak demand*
 - ◆ Most are not at peak demand most of the time
 - ◆ ... so most are *underused*
 - ◆ ... but must pay for electricity for cooling, and for powering all that *reserve capacity*

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Virtual machine

Virtual Machine OS Examples

Linux on zVM on ZSeries

Mainframe

Many Individual Machines

Many Virtual Machines, one

Mainframe

With Kernels, "small is beautiful"

Boot Process

Runlevels

References

Many Virtual Machines, one Mainframe

- Can replace many individual servers with one mainframe running many instances of an OS such as Linux
 - ◆ The demand spread out among all the virtual machines,
 - ◆ total *utilisation high* — demand shared
 - ◆ busy virtual machines get more CPU power to meet peak demand
 - ◆ Much lower power requirements
 - ◆ Much less air conditioning cost
 - ◆ Much less floor space required
- Virtual machines partitioned from each other, like the individual machines in data centre

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Virtual machine

Virtual Machine OS Examples

Linux on zVM on ZSeries

Mainframe

Many Individual Machines

Many Virtual Machines, one Mainframe

With Kernels, "small is beautiful"

Boot Process

Runlevels

References

With Kernels, “small is beautiful”

- The *reliable operation* of any computer depends on its operating system, i.e., it’s kernel.
- More complex software has *higher chance of bugs*, security problems, vulnerability to worms and viruses
- Linus Torvalds imposes a strict discipline on kernel developers to carefully restrict code that will increase size of kernel
- Linux does not suffer from “kernel bloat”
 - ◆ Compare the size of the Windows 2000 “microkernel:” several megabytes, cannot be booted from floppy
 - ◆ Linux: small enough to fit on one floppy together with many useful tools: <http://www.toms.net/rb/>
- *Movies:*
 - ◆ Linus discusses Monolithic, Microkernel design, ETU, avi, avi2

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Virtual machine

Virtual Machine OS Examples

Linux on zVM on ZSeries

Mainframe

Many Individual Machines

Many Virtual Machines, one

Mainframe

With Kernels, “small is beautiful”

Boot Process

Runlevels

References

Booting an Operating System

The OS manages the hard disks.

How can the system read the hard disk to start the OS?

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Booting an Operating System

Booting a PC

Boot Loader

Boot Process

BIOS

VMWare Boot Screen

Boot Loaders: what they do

The kernel is loaded

Real and Protected mode
init

Runlevels

References

Booting a PC

- The process of starting the computer ready for use
- How does a computer boot?
- Involves:
 - BIOS (“basic input output system”) finding the *boot loader*
 - The boot loader starting the kernel
 - For Linux:
 - The kernel starting `init`
 - `init` starting everything else

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Booting an Operating System

Booting a PC

Boot Loader

Boot Process

BIOS

VMWare Boot Screen

Boot Loaders: what they do

The kernel is loaded

Real and Protected mode

init

Runlevels

References

Boot Loader

- A *boot loader* is a piece of software that runs before any operating system, and is
- responsible for loading an operating system kernel, and transferring control to it
- Microsoft OS provides a boot loader that starts their OS from the first active primary partition
- We use the grub (Grand Unified Boot Loader) boot loader that can start any operating system from almost any hard disk, floppy or network.

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Booting an Operating System

Booting a PC

Boot Loader

Boot Process

BIOS

VMWare Boot Screen

Boot Loaders: what they do

The kernel is loaded

Real and Protected mode

init

Runlevels

References

The boot process for a PC

- the BIOS performs a power on self-test (POST)
- the BIOS initialises PCI (Peripheral Component Interconnect) devices
- the bootloader loads the first part of the kernel into system RAM
- the kernel identifies and initialises the hardware in the computer
- the kernel changes the CPU to protected mode
- `init` starts and reads the file `/etc/inittab`
- the system executes the script `/etc/rc.d/rc.sysinit`
- the system executes scripts in `/etc/rc.d/init.d` to start services (daemons)

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Booting an Operating System

Booting a PC

Boot Loader

Boot Process

BIOS

VMWare Boot Screen

Boot Loaders: what they do

The kernel is loaded

Real and Protected mode

init

Runlevels

References

Before the bootloader: The BIOS

- The BIOS runs in *real* mode (like old 8086)
- BIOS tests hardware with basic Power On Self Test (POST)
- BIOS then initialises the hardware.
- Very important for the PCI devices, to ensure no conflicts with interrupts.
- See a list of PCI devices.
- BIOS settings determine order of boot devices; when finds one, loads first sector into RAM, starts executing that code.

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Booting an Operating System

Booting a PC

Boot Loader

Boot Process

BIOS

VMWare Boot Screen

Boot Loaders: what they do

The kernel is loaded

Real and Protected mode

init


Runlevels

References

VMWare Boot Screen

```
PhoenixBIOS 4.0 Release 6.0
Copyright 1985-1998 Phoenix Technologies Ltd.
All Rights Reserved

CPU = Pentium III 1000 MHz
640K System RAM Passed
99M Extended RAM Passed
UMB upper limit segment address: EEFE
Mouse initialized
Fixed Disk 0: VMware Virtual IDE Hard Drive
ATAPI CD-ROM: VMware Virtual IDE CDROM Drive
```



The VMware logo consists of three overlapping squares in red, blue, and purple, followed by the word "vmware" in a lowercase, sans-serif font. Below the logo is the website address "www.vmware.com" in a blue, sans-serif font.

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Booting an Operating System

Booting a PC

Boot Loader

Boot Process

BIOS

VMWare Boot Screen

Boot Loaders: what they do

The kernel is loaded

Real and Protected mode

init

Runlevels

References

Boot Loaders: what they do

- Syslinux is the simplest, grub has the most features, LILO in between
- Grub provides many interactive commands that allow:
 - ◆ Reading many different file systems
 - ◆ Interactively choosing what to boot
 - ◆ Many, many more things (do pinfo grub)
 - ◆ All before any operating system started!!
- Grub and LILO let you choose what OS to boot

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Booting an Operating System

Booting a PC

Boot Loader

Boot Process

BIOS

VMWare Boot Screen

Boot Loaders: what they do

The kernel is loaded

Real and Protected mode

init

Runlevels

References

The kernel is loaded

- Boot loader reads first part of the kernel into RAM, executes the code
- This initial kernel code loads the rest of the kernel into RAM
- The kernel checks the hardware again
- The kernel switches from *real* mode to *protected* mode

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Booting an Operating System

Booting a PC

Boot Loader

Boot Process

BIOS

VMWare Boot Screen

Boot Loaders: what they do

The kernel is loaded

Real and Protected mode

init

Runlevels

References

Real and Protected mode

- **Real mode** exists for booting, and so that can run old DOS programs
- Uses only bottom 16 bits of registers
- Can only access the bottom 1 MB RAM
- BIOS only supports real mode
- **Protected mode** uses all 32 bits of address registers
- Allows access to all RAM
- Allows use of memory management unit
- Normal mode of operation for modern OSes on Intel platform.
- Cannot call BIOS functions in protected mode

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Booting an Operating System

Booting a PC

Boot Loader

Boot Process

BIOS

VMWare Boot Screen

Boot Loaders: what they do

The kernel is loaded

Real and Protected mode

init

Runlevels

References

Kernel in Protected Mode: `init`, PID 1

- The kernel then starts the *first process*, process 1:
`/sbin/init`
- `/sbin/init` reads the `/etc/inittab`
- `init` starts reading the script `/etc/rc.d/rc.sysinit`
- `/etc/inittab` tells `init` to do this
- `init` then executes scripts in `/etc/rc.d/init.d` to start services

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Booting an Operating System

Booting a PC

Boot Loader

Boot Process

BIOS

VMWare Boot Screen

Boot Loaders: what they do

The kernel is loaded

Real and Protected mode

init

Runlevels

References

- A standard Linux system has 7 modes called *runlevels*:
 - 0: halt (shut down the machine)
 - 1: single user mode
 - 2: multiuser with no network services
 - 3: full multiuser mode
 - 4: can be customised; default same as 3
 - 5: multiuser with graphical login
 - 6: reboot

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

Runlevels

Directories for each runlevel

Runlevel directories

Example of service: yum

Turning yum off

Turning yum on

References

Directories for each runlevel

- If you look in `/etc/rc.d`, you see one directory for each runlevel, and a directory called `init.d`:

```
$ ls /etc/rc.d
```

```
init.d  rc0.d  rc2.d  rc4.d  rc6.d      rc.sysinit  
rc      rc1.d  rc3.d  rc5.d  rc.local
```

- `init.d` contains one script for each service. You execute these scripts with the `service` command, i.e.,

```
$ sudo service autofs start
```

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

Runlevels

Directories for each runlevel

Runlevel directories

Example of service: `yum`

Turning yum off

Turning yum on

References

Runlevel directories

- Each of `/etc/rc.d/rc[0-6].d` contains *symbolic links* to scripts in `/etc/rc.d/init.d`
 - ◆ A symbolic link is a bit like a shortcut in Windows (but more fundamental)
 - ◆ We cover symbolic links in detail later
- If name of link begins with `K`, the script will stop (*kill*) the service
- If name of link begins with `S`, will start the service
- The `chkconfig` program creates these symbolic links

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

Runlevels

Directories for each runlevel

Runlevel directories

Example of service: `yum`

Turning yum off

Turning yum on

References

Example of service: yum

- In the laboratory, you set up the `yum` service to automatically install software updates
- You used the `chkconfig` program to enable the service.
 - ◆ For a complete manual on `chkconfig`, type:
\$ **man chkconfig**
 - ◆ For a brief summary of options, type:
\$ **/sbin/chkconfig --help**
- Here we use the program `find` (covered in detail later) to see the links before and after

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

Runlevels

Directories for each runlevel

Runlevel directories

Example of service: `yum`

Turning yum off

Turning yum on

References

Turning yum Service Off

```
■ $ sudo /sbin/chkconfig yum off
$ /sbin/chkconfig yum --list
yum          0:off  1:off  2:off  3:off  4:off  5:off  6:off
$ find /etc/rc.d -name '*yum'
/etc/rc.d/init.d/yum
/etc/rc.d/rc0.d/K01yum
/etc/rc.d/rc1.d/K01yum
/etc/rc.d/rc2.d/K01yum
/etc/rc.d/rc3.d/K01yum
/etc/rc.d/rc4.d/K01yum
/etc/rc.d/rc5.d/K01yum
/etc/rc.d/rc6.d/K01yum
```

- After turning the service off, all the links start with 'K' in all runlevels: 0, 1, 2, 3, 4, 5 and 6.

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

Runlevels

Directories for each runlevel

Runlevel directories

Example of service: yum

Turning yum off

Turning yum on

References

Turning yum Service On

```
■ $ sudo /sbin/chkconfig yum on
$ /sbin/chkconfig yum --list
yum          0:off  1:off  2:on   3:on   4:on   5:on   6:off
$ find /etc/rc.d -name '*yum'
/etc/rc.d/init.d/yum
/etc/rc.d/rc0.d/K01yum
/etc/rc.d/rc1.d/K01yum
/etc/rc.d/rc2.d/S50yum
/etc/rc.d/rc3.d/S50yum
/etc/rc.d/rc4.d/S50yum
/etc/rc.d/rc5.d/S50yum
/etc/rc.d/rc6.d/K01yum
```

- Notice that after turning the service on, there are links that start with 'S' in runlevels 2, 3, 4 and 5.

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

Runlevels

Directories for each runlevel

Runlevel directories

Example of service: yum

Turning yum off

Turning yum on

References

References

- *Modern Operating Systems*, Second Edition, Andrew S. Tanenbaum, Prentice Hall, 2001, Chapter 1. Good discussion of system calls.
- *Operating Systems*, Fourth Edition, William Stallings, Prentice Hall, 2001, chapter 2 particularly pp 85–91 and 98-99, chapter 4, pp 172–178
- *Operating Systems: A Concept Based Approach*, D. M. Dhamdhere, McGraw Hill, 2002

Operating System: Kernel and boot process

Role of OS

System Calls

Types of OS

Monolithic Kernel

Layered Kernel

Microkernel

Virtual machine

Boot Process

Runlevels

References

References